


# Namur Solenoid Valve VM9365

5/2-way | for direct mounting on pneumatic actuators



## General

- » 5/2-way namur solenoid valve for direct mounting on pneumatic actuators.
- » Monostable design.
- » Manual override.
- » 5 W coil.
- » 24VDC, 24VAC, 230VAC.



## Options

- » 3/2-way.
- » Bistable design.
- » 12-240VAC/VDC.

## Materials and Technical Data


Materials	body in aluminum inner parts in stainless steel sealings in NBR
Operating pressure	1,3-10 bar
Flow	740 l/min
Temperature	-10°C to +55°C with cable head
Process temperature	-10°C to +90°C
Medium	lubricated air
Rating	100 % ED
Protection class	IP65
Bore Ømm	6
Power consumption in duty	AC 15 VA (inrush) and 11 VA (hold) DC 5 W



The technical design of the specified product here may be subject to change without notice — datasheet updated February 13, 2013

# Namur Solenoid Valve VM9365

5/2-way | for direct mounting on pneumatic actuators

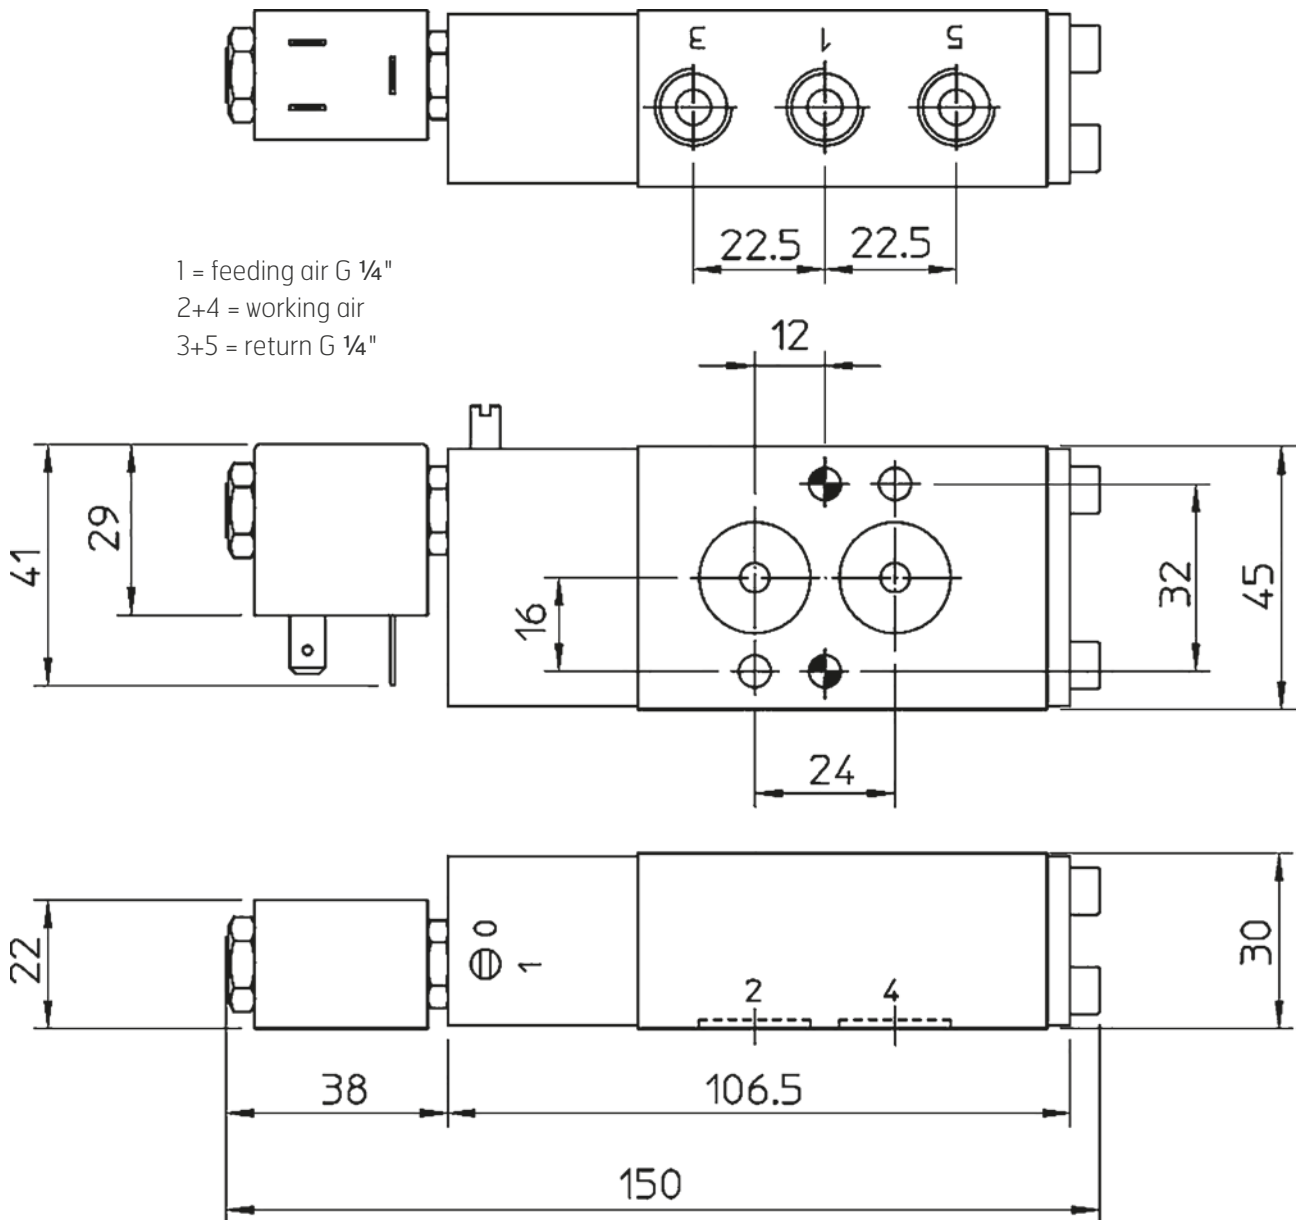

## Mounting

All mounting details are included.

## Maintenance

The solenoid valve is maintenance free.

## Order Information

Namur solenoid valve VM9365 with 5W coil, voltage.....

Cable head VM8700 is ordered separately.

The technical design of the specified product here may be subject to change without notice — datasheet updated February 13, 2013